

# Air/Water/Lube/Hydraulic Reel Packages

## N700 & N800 Series Reels

### LOW PRESSURE

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
<b>47-11</b>	N716-17-18-8L* <b>SHOP AIR ONLY</b> • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	50	300	90
<b>47-29</b>	N716-19-20-10.5J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	50	300	100
<b>47-43</b>	N716-25-26-15.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	75	300	140
<b>47-47</b>	N718-25-26-15.5G* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	100	300	150
<b>47-13</b>	N716-17-18-8L* <b>SHOP AIR ONLY</b> • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	50	280	90
<b>47-24</b>	N716-19-20J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	50	280	100
<b>47-44</b>	N716-25-26-15.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	75	280	140
<b>47-48</b>	N718-25-26-15.5G* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	100	280	160
<b>48-50</b>	N818-23-24-10.5J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/4	50	300	145
<b>48-55</b>	N818-25-26-10.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1	50	300	160



Standard "SR" roller position shown is standard.

## N700 Series Reels

### MEDIUM PRESSURE - N700 SERIES

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
<b>47-25</b>	N716-19-20J* • SAE 100 R1 Type AT hose and HS-35 hose stop installed.	3/8	50	2950	99
<b>47-26</b>	N716-19-20J* • SAE 100 R1 Type AT hose and HS-35 hose stop installed.	1/2	50	2750	102

## N700 Series Reels

### HIGH PRESSURE - N700 SERIES

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
<b>47-27</b>	N716-19-20J H4M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	3/8	50	5100	102
<b>47-28</b>	N716-19-20J H4M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	1/2	50	4250	105



Standard "SR" roller position shown is standard.

**Note:** \*Must specify roller position SR, VR, TR. See back page for roller position information.


# You Can't Buy A Better Reel.

## Welding Reel Packages

### N400 Series Reels

#### OXYGEN/ACETYLENE REELS

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
55-10	N416-19-20-8J* • Twin Grade R hose and HS-35 hose stop installed.	1/4	50	200	103
55-11	N416-19-20-8J * • Twin Grade T hose and HS-35 hose stop installed.	1/4	50	200	103
55-12	N416-19-20-8J* • Twin Grade R hose and HS-35 hose stop installed.	3/8	50	200	109
55-13	N416-19-20-8J* • Twin Grade T hose and HS-35 hose stop installed.	3/8	50	200	109



Optional "TR" roller position shown.  
"SR" roller position is standard.  
Torch not included

## Grease Reel Packages

### N500 Series Hose Reels

#### GREASE REELS

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
45-11	N515-19-20J H10M* • SAE 100 R2 Type AT hose and HS-35 hose stop installed.	1/4	50	5800	98
45-13	N515-19-20J H8M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	3/8	50	5100	99




Optional "TR" roller position shown.  
"SR" roller position is standard.

## Live Cable Reel Packages

### NSCR Series Cable Reels

#### LIVE CABLE REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
14-81	NSCR715-19-20J * • 3-conductor, 45 amp, 600V S00W 12/3 black cable, 15A straight blade receptacle and HS-35 hose stop installed.	.60	50	125
14-82	NSCR716-23-24-15.5G* • 3-conductor, 45 amp, 600V S00W 12/3 black cable, 15A straight blade receptacle and HS-35 hose stop installed.	.60	100	140



Standard "SR" roller position shown is standard.

**Note:** \*Must specify roller position SR, VR, TR. See back page for roller position information.

## DEF Packages

### Diesel Exhaust Fluid Series

#### 1/2" X 50' DEF REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
47-63	DEF-450H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 1/2" female NPT riser, "Tru Blue" DEF hose with 1/2" male NPT fittings and HS-35 hose stop installed.	1/2	50	110

#### 3/4" X 50' DEF REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
47-53	DEF-650H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 3/4" female NPT riser, "Tru Blue" DEF hose with 3/4" male NPT fittings and HS-35 hose stop installed.	3/4	50	127

#### 1" X 50' DEF REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-42	DEF-850H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 1" female NPT riser, "Tru Blue" DEF hose with 1" male NPT fittings and HS-35 hose stop installed.	1	50	160



Optional "TR" roller position shown.  
"SR" roller position is standard.

## Fuel Packages


### N800 Series Reels - Gas/Diesel

#### 3/4" X 50' REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-51	N818-23-24-10.5J* • 1" 90° Super Swivel with Viton, 1" female NPT riser, Goodyear BC fuel hose (200 psi) and HS-35 hose stop installed.	3/4	50	140

#### 1" X 50' REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-56	N818-25-26-10.5B* • 1" 90° Super Swivel with Viton, 1" female NPT riser, Goodyear BC fuel hose (200 psi) and HS-35 hose stop installed.	1	50	164

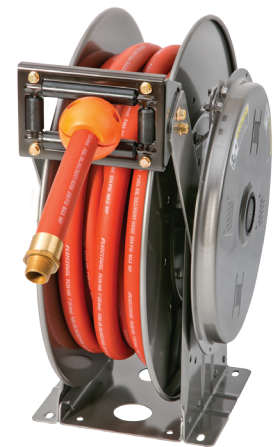


Gas/Diesel fuel hose shown with optional "TR" roller position shown.  
"SR" roller position is standard.

**Note:** \*Must specify roller position SR, VR, TR. See back page for roller position information.

# Roller Positions

## BE SURE TO SPECIFY ROLLER POSITION WHEN ORDERING

On standard spring rewind reels, the hose/cable pays out from the bottom of the reel and to the left when reel is viewed from the swivel joint or collector ring side. **Hose/cable rollers are supplied with all spring rewind models and you must specify the roller position when you order.** (If roller position is not specified, reels will be shipped with rollers in POSITION SR.)



### Specify roller position SR when reel will be:

- Installed in the upright position at any point from floor to eye level.
- Installed on a wall with hose/cable to be retracted close to the wall.
- Installed on ceiling, hose/cable will pay out parallel to and close to the ceiling.


**Position SR (Standard) Shown:**  
Swivel Joint Right



### Specify roller position VR when reel will be:

- Installed in the upright position, hose/cable will be pulled upright from the reel.
- Installed on ceiling to lift hose/cable.
- Installed on a wall with hose/cable to be pulled straight out

**Position VR Shown:**  
Swivel Joint Right



### Specify roller position TR when reel will be:

- Installed on floor.
- Installed on ceiling with hose/cable to pay out parallel to the ceiling.
- Installed on a wall with hose/cable to be pulled straight down.

**Position TR Shown:**  
Swivel Joint Left

